



Your Dairy Grade Hose Connection

DAIRY DELIVERY HOSE



www.jgbhose.com

Click for directions:

New England Region
Liverpool, NY 13088
(315) 451-2770

Great Lakes Region
Cheektowaga, NY 14225
(716) 684-8224

Mid-Atlantic Region
Charlotte, NC 28273
(704) 588-9920

Midwest Region
St. Louis, MO 63111
(314) 256-0833

Gulf Coast Region
Pasadena, TX 77503
(281) 930-7777

Contitech 3-A Series Hoses

Plicord ExtremeFlex Beverage Hose



- Tube:** White Chlorobutyl (FDA/USDA compliant & conforms to a 3-A Sanitary Standard 18-03)
- Reinforcement:** Spiral-plyed fabrics with double galvanized helix wire
- Cover:** Corrugated grey chemical (wrapped impression)
- Temperature:** -30°F to 220°F (-34°C to 104°C)
- Order Codes:** 549-603 Gray Cover
549-004 Red Microban Cover

For beer, wine, distillery and beverage (edible liquid) transfer processing facilities. Ideal for applications requiring flexible and/or tight bend connections.

Item#	ID		Nom. OD		Max. WP		Bend Radius		Vacuum HG@72°F		Weight	
	in.	mm	in.	mm	psi	MPa	in.	mm	in.	mm	lbs/ft	kg/m
20762678	1	25.4	1.56	39.7	250	1.72	1.5	38	29	737	0.73	1.09
20762679	1½	38.1	2.02	51.3	250	1.72	2.3	57	29	737	0.92	1.38
20762751	2	50.8	2.53	64.2	250	1.72	3.0	76	29	737	1.20	1.79
20762752	3	76.2	3.59	91.2	200	1.38	4.5	114	29	737	2.02	3.01
20762753	4	101.6	4.60	116.8	150	1.03	6.0	152	29	737	2.76	4.11

Contitech 3-A Series Hoses

Plicord ExtremeFlex Beverage Red w/EZ Clean Cover Hose




- Tube:** White Chlorobutyl (FDA/USDA compliant & conforms to a 3-A Sanitary Standard 18-03)
- Reinforcement:** Spiral-plied fabrics with double galvanized helix wire
- Cover:** Corrugated grey chemical (wrapped impression), new corrugated red EZ Clean UHMWPE cover (semi-smooth finish)
- Packaging:** 100' length, coiled, polywrapped
- Temperature:** -30°F to 220°F (-34°C to 104°C)
- Order Codes:** 549-605 EZ Clean Red Cover

For beer, wine, distillery and beverage (edible liquid) transfer processing facilities. Ideal for applications requiring flexible and/or tight bend connections.

Item#	ID		Nom. OD		Max. WP		Bend Radius		Vacuum HG@72°F		Weight	
	in.	mm	in.	mm	psi	MPa	in.	mm	in.	mm	lbs/ft	kg/m
20776605	1	25.4	1.52	38.7	250	1.72	2	51	29	737	0.65	0.96
20762754	1½	38.1	2.03	51.6	250	1.72	3	76	29	737	0.93	1.38
20752524	2	50.8	2.537	64.5	250	1.72	4	102	29	737	1.21	1.80
20762758	3	76.2	3.601	91.5	200	1.38	6	152	29	737	2.03	3.02
20762760	4	101.6	4.607	117	150	1.03	8	203	29	737	2.77	4.12

Contitech 3-A Series Hoses

Plicord ExtremeFlex Food Hose

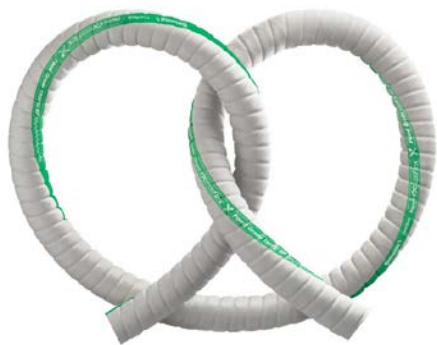

- Tube:** White Chemivic™ synthetic rubber (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03)
- Reinforcement:** Spiral-plied synthetic fabric with galvanized wire helix
- Cover:** White or gray Chemivic™ corrugated synthetic rubber (wrapped impression)
- Packaging:** ¼”-5/8” - 300’ Bagel Pack, one piece
¾” and 1” - 200’ Bagel Pack, one piece
- Temperature:** -25°F to 212°F (- 32°C to 100°C)
- Branding:** Continental ContiTech Plicord® ExtremeFlex™ Food Grade 150 psi WP
- Non-Stock/Sizes:** 400’ minimum order
- Order Codes:** 549-462 (white)
549-164 (gray)


A high-tech, flexible corrugated hose with pretzel-like agility and proven performance. Best of all, it is available at a non-corrugated price, making it a great value. With ExtremeFlex™, there’s even more to appreciate:

- **Flexible Handling:** Easier to move in and out of tight spaces and around sharp corners.
- **Lightweight:** Easier to lift and carry, so there are fewer workplace injuries.
- **Lower Force to Bend:** Easier to connect and disconnect, keeping productivity high.

SAP#	SAP#	ID		Nom. OD		Max. WP		Bend Radius		Vacuum HG		Weight			
		White	Gray	in.	mm	in.	mm	psi	MPa	in.	mm	in.	mm	lbs/ft	kg/m
20478040	20483718			2	51.2	2.4	62.0	150	1.03	2	51	29	737	1.00	1.48
20478043	20483781			3	76.1	3.5	89.9	150	1.03	3	76	29	737	1.89	2.79
20478044	20483782			4	102.1	4.6	116.6	150	1.03	4	102	29	737	2.69	3.98

Contitech 3-A Series Hoses

Plicord Brewline Hose

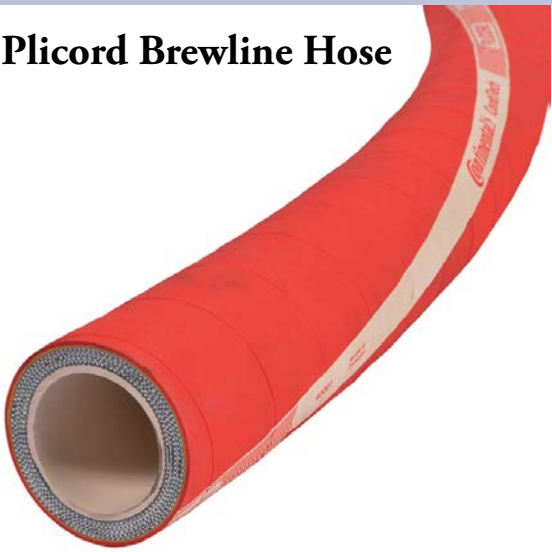

- Tube:** White chlorobutyl rubber (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03)
- Reinforcement:** Spiral-plied synthetic fabric, 4 plies to 1½” ID; 6 plies over 1½” ID
- Cover:** Red EPDM with a white spiral stripe (wrapped impression)
- Packaging:** 100’ length, coiled, polywrapped
- Temperature:** -40°F to 220°F (-40°C to 104°C)
- Branding:** Example: Continental ContiTech Plicord® Brewline® hose 250 psi; FDA, 3-A and USDA
- Order Codes:** 549-885 Red Cover
549-003 Microban with Red Cover

A quality discharge hose designed specifically for the highly demanding service of transferring non-oily liquid products in wineries and breweries.

SAP#	ID		Nom. OD		Max. WP		Weight		
	Red	in.	mm	in.	mm	psi	MPa	lbs/ft	kg/m
20020324		¾	19.1	1.34	34.0	250	1.72	0.54	0.80
20020327		1	25.4	1.69	42.9	250	1.72	0.81	1.21
20032192		1-1/4	31.8	2.00	50.8	250	1.72	1.05	1.56
20020335		1½	38.1	2.23	56.6	250	1.72	1.19	1.77
20020341		2	50.8	2.88	73.2	250	1.72	1.86	2.77
20020345		2½	63.5	3.51	89.2	250	1.72	2.66	3.96
20020348		3	76.2	4.09	103.9	250	1.72	3.57	5.31
20020352		4	101.6	5.31	134.9	250	1.72	5.43	8.08

Contitech 3-A Series Hoses

Plicord Winline Hose



- Tube:** White chlorobutyl rubber (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03)
- Reinforcement:** Spiral-ply synthetic fabric, 4 plies to 1½" ID; 6 plies over 1½" ID
- Cover:** White EPDM rubber with a purple spiral stripe (wrapped impression)
- Packaging:** ¼"-5/8" - 300' Bagel Pack, one piece
¾" and 1" - 200' Bagel Pack, one piece
- Temperature:** -40°F to 220°F (-40°C to 104°C)
- Branding:** Example: Continental ContiTech Plicord® Winline® hose 250 psi; FDA, 3-A, and USDA

A quality, non-toxic hose for handling wine, potable water, and other non-oily liquid food products where the hose must meet FDA requirements. For discharge service and suction service up to 20" hg vacuum at ambient temperature.

SAP#	ID		Nom. OD		Max. WP		Weight	
	in.	mm	in.	mm	psi	MPa	lbs/ft	kg/m
20020367	¾	19.1	1.39	35.3	250	1.72	0.60	0.89
20020371	1	25.4	1.69	42.9	250	1.72	0.80	1.19
20099578	1¼	31.8	2.00	50.8	250	1.72	1.04	1.55
20020376	1½	38.1	2.23	56.6	250	1.72	1.20	1.79
20020379	2	50.8	2.92	74.2	250	1.72	1.98	2.95
20020380	2½	63.5	3.50	88.9	250	1.72	2.65	3.94
20020382	3	76.2	4.09	103.9	250	1.72	3.55	5.28
20031599	4	101.6	5.30	134.6	250	1.72	5.40	8.04

Contitech 3-A Series Hoses

Vintner Reserve 250 CB Hose



- Tube:** White chlorobutyl (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03)
- Reinforcement:** Spiral-plyed synthetic fabric with Monofilament Helix
- Cover:** Gray EPDM synthetic rubber (wrapped) / purple branding tape
- Packaging:** 100' length, coiled, polywrapped
- Temperature:** -30°F to 220°F (- 34°C to 104°C)
- Branding:** Example: Continental ContiTech Plicord® Vintner™ 250 psi; FDA, 3-A, and USDA
- Order Codes:** 549-886 White Cover
549-009 Red Microban Cover

For handling in-plant and/or tank truck transfer of wine, beer, portable water and other non-oily liquid foodstuffs.

SAP#	ID		OD		WP		Bend Radius		Vacuum HG@72°F		Weight		
	Gray	in.	mm	in.	mm	psi	MPa	in.	mm	in.	mm	lbs/ft	kg/m
20991699		1	25.4	1.56	39.70	250	1.72	3	76	27	686	0.60	0.89
20992570		1½	38.1	2.06	52.34	250	1.72	4	102	27	686	0.83	1.24
20992571		2	50.8	2.61	66.25	250	1.72	7	178	27	686	1.18	1.76
20992572		2½	63.5	3.16	80.34	250	1.72	10	254	27	686	1.59	2.37
20992573		3	76.2	3.81	96.85	250	1.72	12	305	27	686	2.34	3.48

Vintner Reserve 250 EPDM Hose



- Tube:** EPDM Rubber; Meets FDA, USDA & 3-A Sanitary Standard 18-03 Certificate #3737
- Reinforcement:** Spiral-plyed Fabrics with Monofilament Helix
- Cover:** EPDM Synthetic Rubber (Wrapped Impression)
- Packaging:** 100' coils polywrapped
- Temperature:** -30°F to 220°F
- Branding:** Example: CONTINENTAL VINTNER RESERVE 250 EPDM FDA 3-A & USDA
- Order Codes:** 549-695

For handling in-plant and/or tank truck transfer of wine, beer, portable water and other non-oily liquid foodstuffs.

SAP#	ID		OD		WP		Bend Radius		Vacuum HG@72°F		Weight		
	Gray	in.	mm	in.	mm	psi	MPa	in.	mm	in.	mm	lbs/ft	kg/m
20943391		1	25.4	1.59	40.50	250	1.72	3	76	27	686	0.64	0.952
20943392		1½	38.1	2.09	53.10	250	1.72	4	102	27	686	0.89	1.324
20943393		2	50.8	2.64	67.10	250	1.72	7	178	27	686	1.25	1.860
20943394		2½	63.5	3.18	80.70	250	1.72	10	254	27	686	1.62	2.411
20943395		3	76.2	3.85	97.70	250	1.72	12	305	27	686	2.45	3.646

Contitech 3-A Series Hoses

Pliovic FG Hose



- Tube:** Clear Pliovic® compound, conforms to FDA, USDA, NSF-61 and 3-A standards
- Reinforcement:** Spiral synthetic yarn
- Cover:** Clear Pliovic® compound, conforms to FDA, USDA, NSF-61 and 3-A standards
- Packaging:** ¼”-5/8” - 300’ Bagel Pack, one piece
¾” and 1” - 200’ Bagel Pack, one piece
- Temperature:** -10°F to 158°F (-23°C to 70°C)
- Branding:** Example: Continental ContiTech Pliovic® FG FDA & 3-A Compliant ¾” ID (9.5mm) 250 psi WP (1.7 MPa). Made in U.S.A.
- Non-Stock/Sizes:** Contact customer service for availability on cut, coiled and tied hose lengths.

A versatile, lightweight, reinforced tubing for the food and beverage, general air, multipurpose, pharmaceutical and cosmetics industries; computer component manufacturers; textile mills; and air-actuated equipment.

SAP#	ID		Nom. OD		Max. WP		Weight		
	Clear	in.	mm	in.	mm	psi	MPa	lbs/ft	kg/m
20129509		¼	6.4	0.44	11.2	250	1.72	0.05	0.07
20129600		5/16	7.9	0.50	12.7	250	1.72	0.07	0.10
20129601		3/8	9.5	0.59	15.0	250	1.72	0.08	0.12
20129602		½	12.7	0.75	19.1	200	1.38	0.12	0.18
20129603		5/8	15.9	0.87	22.1	200	1.38	0.15	0.22
20337878		¾	19.1	1.02	25.9	150	1.03	0.19	0.28
20316305		1	25.4	1.34	34.0	125	0.86	0.31	0.46
20463346		1¼	31.75	1.72	43.6	125	0.86	0.60	0.89
20463340		1½	38.1	1.98	50.2	125	0.86	0.72	1.07

Food Master™ Xtreme™ 250SD CR Hose



- Tube:** Type S (Sanitron™). White.
- Reinforcement:** Synthetic, high tensile textile with static conductive filament; resilient monofilament helix providing crush and kink resistance.
- Cover:** Type P (EPDM). White or gray with burgundy spiral stripe.
- Design Factor:** 4:1
- Packaging:** 100' coiled and wrapped in polyethylene.
- Temperature:** -40°F to +230°F (-40°C to +110°C) continuous service.
- Branding:** Continuous transfer label. Example: “Gates® Food Master™ Xtreme™ 250SD CR Meets FDA, 3A and USDA 250 PSI WP (1.72MPa) Made in U.S.A.”
- Standards:** Meets FDA requirements, 3A-Class 3 and USDA.

Transfer of milk, juice, beer, soft drinks, pharmaceuticals, cosmetics or water-based products requiring an FDA sanitary hose. It is also suitable for many dry bulk products via suction, pneumatic or gravity where a sanitary hose is required.

Color	ID		OD		Max WP		Vac	MBR	Wt./Ft	Length	Item #
	in	mm	in	mm	psi	bar	in/Hg	in	lbs	ft	
Gray	¾	19.1	1.22	31.0	250	17.2	30.0	2.0	.42	100	CPEB-012
Gray	1	25.4	1.48	37.6	250	17.2	30.0	3.0	.52	100	CPEB-016
Gray	1½	38.1	2.07	52.6	250	17.2	30.0	4.5	.90	100	CPEB-024
Gray	1½	38.1	2.07	52.6	250	17.2	30.0	4.5	.90	200	CPEB-024
Gray	2	50.8	2.62	66.5	250	17.2	30.0	6.0	1.21	100	CPEB-032
Gray	2½	63.5	3.25	82.6	250	17.2	30.0	12.0	1.82	100	CPEB-040
Gray	2½	63.5	3.25	82.6	250	17.2	30.0	12.0	1.81	200	CPEB-040
Gray	3	76.2	3.86	98.0	250	17.2	30.0	18.0	2.46	100	CPEB-048
Gray	4	101.6	4.88	124.0	250	17.2	30.0	36.0	3.24	100	CPEB-064
White	¾	19.1	1.22	31.0	250	17.2	30.0	2.0	.42	100	CPEB-012
White	1	25.4	1.48	37.6	250	17.2	30.0	3.0	.52	100	CPEB-016
White	1½	38.1	2.07	52.6	250	17.2	30.0	4.5	.90	100	CPEB-024
White	2	50.8	2.62	66.5	250	17.2	30.0	6.0	1.19	100	CPEB-032
White	2½	63.5	3.25	82.6	250	17.2	30.0	12.0	1.82	100	CPEC-040
White	3	76.2	3.86	98.0	250	17.2	30.0	18.0	2.47	100	CPEC-048
White	4	101.6	4.88	124.0	250	17.2	30.0	36.0	3.24	100	CPEC-064

Gates 3-A Series Hoses

Food Master® Beverage 150SD CR Hose




- Tube:** Type M (Sanitron™). White.
- Reinforcement:** Synthetic, high tensile textile with resilient monofilament helix providing crush and kink-resistance.
- Cover:** Type P (EPDM). Gray with burgundy stripe. Corrugated abrasion resistant UHMW cover option available.
- Design Factor:** 4:1
- Temperature:** -40°F to +212°F (-40°C to +100°C) continuous service.
- Standards:** Meets FDA requirements, 3A-Class 3 and USDA.

Transfer of milk, juice, beer, soft drinks, pharmaceuticals, cosmetics, or water-based products requiring an FDA sanitary hose.

Color	ID		OD		Max WP		Vac	MBR	Wt./Ft	Length	Item #
	in	mm	in	mm	psi	bar	in/Hg	in	lbs	ft	
Gray	1½	38.1	2.00	50.8	150	10.3	30.0	6.0	.65	100	GFMB-024
Gray	2	50.8	2.50	63.5	150	10.3	30.0	12.0	.96	100	GFMB-032
Gray	2½	63.5	3.11	79.0	150	10.3	30.0	22.0	1.62	100	GFMB-040
Gray	3	76.2	3.75	95.3	150	10.3	30.0	20.0	2.13	100	GFMB-048
Gray	4	101.6	4.76	120.9	150	10.3	30.0	28.0	3.16	100	GFMB-064

Food Master® Beverage 250SD CR Hose



- Tube:** Type S (Sanitron™). White.
- Reinforcement:** Synthetic, high tensile textile with resilient monofilament helix providing crush and kink-resistance.
- Cover:** Type P (EPDM). White with burgundy stripe.
- Design Factor:** 4:1
- Temperature:** -40°F to +230°F (-40°C to +110°C) continuous service.
- Standards:** Meets FDA requirements, 3A-Class 3 and USDA.

Transfer of milk, juice, beer, soft drinks, pharmaceuticals, cosmetics or water-based products requiring a FDA sanitary hose.

Color	ID		OD		Max WP		Vac	MBR	Wt./Ft	Length	Item #
	in	mm	in	mm	psi	bar	in/Hg	in	lbs	ft	
White	1	25.4	1.48	37.6	250	17.2	30.0	3.0	.52	100	3132-0180
White	1½	38.1	2.07	52.6	250	17.2	30.0	4.5	.97	100	3132-0181
White	2	50.8	2.62	66.5	250	17.2	30.0	6.0	1.32	100	3132-0182
White	2½	63.5	3.25	82.6	250	17.2	30.0	12.0	1.60	100	3132-0186
White	3	76.2	3.86	98.0	250	17.2	30.0	18.0	2.20	100	3132-0183
White	4	101.6	4.88	124.0	250	17.2	30.0	36.0	2.75	100	3132-0184

Gates 3-A Series Hoses

Food Master® Oils and Dairy 150SD Hose



- Tube:** Type C2 (Modified Nitrile). Sanitary FDA and 3A-Class 3. White.
- Reinforcement:** Synthetic, high tensile textile with steel wire helix
- Cover:** Type C2 (Modified Nitrile). White corrugated with burgundy stripe.
- Design Factor:** 4:1
- Packaging:** 100' coiled and wrapped in polyethylene.
- Temperature:** -40°F to +230°F (-40°C to +110°C) continuous service.
- Standards:** Tube meets FDA requirements, 3A-Class 3 and USDA. Phthalate free.

Transfer of milk, juice, beer, soft drinks, pharmaceuticals, cosmetics or water-based products requiring an FDA sanitary hose. It is also suitable for many dry bulk products via suction, pneumatic or gravity where a sanitary hose is required.

Color	ID		OD		Max WP		Vac	MBR	Wt./Ft	Length	Item #
	in	mm	in	mm	psi	bar	in/Hg	in	lbs	ft	
White	3/4	19.1	1.29	32.8	150	10.3	30.0	2.0	.65	100	GFMOD-012
White	3/4	19.1	1.29	32.8	150	10.3	30.0	2.0	.64	200	GFMOD-012
White	1	25.4	1.54	39.1	150	10.3	30.0	3.0	.79	100	GFMOD-016
White	1½	38.1	2.05	52.1	150	10.3	30.0	4.5	1.15	100	GFMOD-024
White	2	50.8	2.55	64.8	150	10.3	30.0	6.0	1.50	100	GFMOD-032
White	2½	63.5	3.08	78.2	150	10.3	30.0	12.0	1.98	100	GFMOD-040
White	3	76.2	3.58	90.9	150	10.3	30.0	18.0	2.35	100	GFMOD-048
White	4	101.6	4.60	116.8	150	10.3	30.0	24.0	3.12	100	GFMOD-064
White	4	101.6	4.60	116.8	150	10.3	30.0	18.0	3.13	200	GFMOD-064
White	6	152.4	6.69	169.9	150	10.3	30.0	36.0	5.59	50	GFMOD-096

Food Master-Flex® SD Clear Hose



- Tube:** Type G (PVC). Sanitary FDA. Clear. Smooth
- Reinforcement:** Rigid thermoplastic reinforcement. Clear
- Cover:** Type G (PVC). Sanitary FDA. Clear. Smooth
- Design Factor:** 3:1
- Temperature:** -10°F to +130°F (-23°C to +55°C) continuous service.
- Standards:** Meets FDA requirements, 3A-Class 3 and USDA.

Transfer of bulk food products via suction, pneumatic or gravity systems where sanitary hose is required.

Color	ID		OD		Max WP		Vac	MBR	Wt./Ft	Length	Item #
	in	mm	in	mm	psi	bar	in/Hg	in	lbs	ft	
Clear	1	25.4	1.29	32.8	100	6.9	28.0	3.0	.30	100	GFMFSDC-016
Clear	1¼	31.8	1.56	39.6	90	6.2	28.0	4.0	.38	100	GFMFSDC-020
Clear	1½	38.1	1.84	46.7	90	6.2	28.0	5.0	.48	100	GFMFSDC-024
Clear	2	50.8	2.39	60.7	70	4.8	28.0	6.0	.71	100	GFMFSDC-032
Clear	2½	63.5	2.92	74.2	65	4.5	28.0	8.0	.97	100	GFMFSDC-040
Clear	3	76.2	3.46	87.9	60	4.1	28.0	9.0	1.27	100	GFMFSDC-048
Clear	4	101.6	4.56	115.8	50	3.4	28.0	12.0	2.00	100	GFMFSDC-064

Novaflex 3-A Series Hoses

6300 Series Hose

Nitrile Food 150 Suction & Discharge Hose



- Tube:** FDA white nitrile
- Reinforcement:** Multiple plies of polyester tire cord with helix wire
- Cover:** Grey PVC nitrile.
- Length:** 100 ft.
- Temperature Range:** -40°F (-40°C) to +210°F (+99°C)
- Range:** (Cleaning In Place to 248°F (+120°C) Not for continuous steam service.

Recommended for the food transfer application that demands both flexibility and ruggedness with a clean white FDA grade tube. Meets FDA, USDA & 3A sanitary standards Authorized #1376. The food grade nitrile tube is odorless and tasteless for those oily transfer applications. Excellent for suction and discharge applications. This ultra smooth microbe resistant tube is built on special stainless steel mandrels for cleanliness.

Item #	I.D.	O.D.	Plies	WP	MBR	WT
				psi		lbs/ft
N6300-00750-012	¾	1.29	2	150	4	0.4
N6300-01000-016	1	1.54	2	150	5	0.5
N6300-01500-024	1½	2.05	2	150	6	0.71
N6300-02000-032	2	2.55	2	150	7	0.95
N6300-03000-048	3	3.76	2	150	9	1.51
N6300-04000-064	4	4.76	2	150	12	1.98

6301 Series Hose

Nitrile Food Discharge Hose



- Tube:** FDA white nitrile
- Reinforcement:** Multiple plies of polyester tire cord with helix wire
- Cover:** Grey PVC nitrile.
- Length:** 100 ft.
- Temperature Range:** -40°F (-40°C) to +210°F (+99°C)
(Cleaning In Place to 248°F (+120°C) Not for continuous steam service.)

Recommended for the food transfer application that demands both flexibility and ruggedness with a clean white FDA grade tube. Meets FDA, USDA & 3A sanitary standards Authorized #1376. The food grade nitrile tube is odorless and tasteless for those oily transfer applications. Excellent for discharge applications. This ultra smooth microbe resistant tube is built on special stainless steel mandrels for cleanliness.

Item #	I.D.	O.D.	Plies	WP	MBR	WT
				psi		lbs/ft
N6301-00500-008	1/2	.99	2	250	n/a	0.31
N6301-00750-012	3/4	1.24	2	250	n/a	0.41
N6301-01000-016	1	1.62	4	250	n/a	0.64
N6301-01500-024	1 1/2	2.12	4	250	n/a	0.93
N6301-02000-032	2	2.62	4	250	n/a	1.26
N6301-03000-048	3	3.64	4	250	n/a	1.64
N6301-03000-048	3	3.76	6	250	n/a	1.91
N6301-04000-064	4	4.64	4	250	n/a	2.19
N6301-04000-064	4	4.76	6	250	n/a	2.53

Novaflex 3-A Series Hoses

6303 Series Hose

Corrugated Nitrile Food 150 Suction & Discharge Hose



- Tube:** FDA white nitrile
- Reinforcement:** Multiple plies of polyester tire cord with helix
- Cover:** Grey PVC nitrile.
- Length:** 100 ft.
- Temperature Range:** -40°F (-40°C) to +210°F (+99°C)
(Cleaning In Place to 248°F (+120°C) Not for continuous steam service)

This food transfer hose is designed to provide maximum flexibility along with an abrasive resistant cover. Excellent for the transfer of oily product in full suction and discharge applications. Meets FDA, USDA & 3A sanitary standards Authorized #1376. This ultra smooth microbe resistant tube is built on special stainless steel mandrels for cleanliness.

Item #	I.D.	O.D.	Plies	WP	MBR	WT
				psi		lbs/ft
N6303-01500-024	1½	2.13	2	150	6	0.73
N6303-02000-032	2	2.63	2	150	7	0.98
N6303-03000-048	3	3.74	2	150	9	1.53
N6303-04000-064	4	4.75	2	150	12	1.99

Novaflex 3-A Series Hoses

6500 Series Hose

Connoisseurs Food & Beverage Suction and Discharge Hose



- Tube:** FDA white nitrile
- Reinforcement:** Multiple plies of polyester tire cord with helix
- Cover:** Grey PVC nitrile.
- Length:** 100 ft.
- Temperature Range:** -40°F (-40°C) to +210°F (+99°C)
- Range:** (Cleaning In Place to 248°F (+120°C) Not for continuous steam service.

The connoisseur line of food hose is designed to meet the food processing industries demanding applications. Connoisseur is built in a variety of hose constructions utilizing a white chlorobutyl tube for non-oily applications that will not impart taste or odor. Meets FDA, USDA, and 3-A Sanitary Standards Authorized (#1376). Resistant to CIP solutions. This ultra smooth microbe resistant tube is built on special stainless steel mandrels for cleanliness.

Item #	I.D.	O.D.	Plies	Max WP	MBR	Vacuum Rating	WT
				psi			lbs/ft
N6500-00750-012	¾	1.29	2	150	4	Full	0.4
N6500-01000-016	1	1.54	2	150	5	Full	0.5
N6500-01500-024	1½	2.05	2	150	6	Full	0.71
N6500-02000-032	2	2.55	2	150	7	Full	0.95
N6500-02500-036	2½	3.14	2	150	8	Full	1.19
N6500-03000-048	3	3.67	2	150	12	Full	1.51
N6500-04000-064	4	4.67	2	150	16	Full	1.98

Novaflex 3-A Series Hoses

6501 Series Hose

Connoisseurs Discharge Hose



- Tube:** White chlorobutyl (microbe resistant (non oily applications))
- Reinforcement:** Multiple plies of polyester tire cord
- Cover:** Grey EPDM
- Length:** 100 ft.
- Temperature:** -40°F (-40°C) to +240°F (+116°C)
(Cleaning In Place to 248°F (+120°C) Not for continuous steam service, can be open end steam cleaned.

Same high quality hose as Novaflex 6500, designed to handle non-oily applications only. The multi-ply construction provides excellent resistance to kinking. Meets the requirements of FDA, USDA & 3-A (cert#1376)

Item #	I.D.	O.D.	Plies	Max WP	WT
				psi	lbs/ft
N6501-00500-008	½	.99	2	250	0.31
N6501-07500-012	¾	1.24	2	250	0.41
N6501-01000-016	1	1.49	2	250	0.52
N6501-01000-016	1	1.62	4	250	0.64
N6501-01500-024	1½	2.12	4	250	0.93
N6501-02000-032	2	2.62	4	250	1.26
N6501-03000-048	3	3.64	4	250	1.64
N6401-03000-048	3	3.76	6	250	1.91
N6401-04000-064	4	4.64	4	250	2.19
N6401-04000-064	4	4.76	6	250	2.53

Novaflex 3-A Series Hoses

6502 Series Hose

High Pressure, Superior Quality Brewery Discharge Hose



- Tube:** White chlorobutyl (non oily applications)
- Reinforcement:** Multiple plies of polyester tire cord
- Cover:** Red EPDM
- Length:** 100 ft.
- Temperature:** -40°F (-40°C) to +240°F (+116°C)
(Cleaning In Place to 248°F (+120°C) Not for continuous steam service.)

Same high quality hose as Novaflex 6500, designed to handle non-oily applications only. The multi-ply construction provides excellent resistance to kinking. Meets the requirements of FDA, USDA & 3-A (cert#1376)

Item #	I.D.	O.D.	Plies	Max WP	WT
				psi	lbs/ft
N6502-00750-012	¾	1.37	4	350	.59
N6502-01000-0016	1	1.70	4	350	.85
N6502-01500-024	1½	2.25	4	350	1.25
N6502-02000-032	2	2.88	6	350	1.89
N6502-02500-040	2½	3.51	6	350	2.70
N6502-03000-048	3	4.04	6	350	3.45
N6502-04000-064	4	5.31	6	350	5.40

Novaflex 3-A Series Hoses

6503 Series Hose

Connoisseurs Food & Beverage Hose



- Tube:** White chlorobutyl (non oily applications)
- Reinforcement:** Multiple plies of polyester tire cord
- Cover:** Grey EPDM
- Length:** 100 ft.
- Temperature Range:** -40°F (-40°C) to +240°F (+116°C)
(Cleaning In Place to 248°F (+120°C) Not for continuous steam service.)

The same hose as Novaflex 6500 but with a corrugated cover. The special smooth chlorobutyl bacteria resistant tube is designed for non-oily products and will not impart odor or taste. Meets FDA, USDA & 3-A.

Item #	I.D.	MBR	Plies	WP	WT
				psi	lbs/ft
N6503-02000-032	2	7	2	150	0.95
N6503-02500-040	2½	8	2	150	1.19
N6503-03000-048	3	9	2	150	1.51
N6503-04000-064	4	12	2	150	1.98

6505 Series Hose

Connoisseurs Wine Hose



- Tube:** White chlorobutyl (non oily applications)
- Reinforcement:** Multiple plies of tire cord and dual mono-filament helix
- Cover:** Purple EPDM
- Length:** 100 ft.
- Temperature:** -40°F (-40°C) to +240°F (+116°C)
(Cleaning In Place to 248°F (+120°C) Not for continuous steam service.)

Connoisseurs Wine Hose. Special kink and crush resistant rubber hose, designed utilizing a multi-ply construction with dual special monofilament helix rods. The tube is for non-oily application. Designed to meet the demands of “cleaning in process”. This ultra smooth microbe resistant tube is built on special stainless steel mandrels for cleanliness.

Item #	I.D.	O.D.	MBR	VAC	Plies	WP	WT
			(in)	(HG)		psi	lbs/ft
N6505-00750-012	¾	1.41	3	Full	2	250	0.39
N6505-01000-016	1	1.64	4	Full	2	250	0.48
N6505-01500-024	1½	2.14	5	Full	2	250	0.68
N6505-02000-032	2	2.77	7	Full	4	250	1.27
N6505-02500-040	2½	3.29	13	Full	4	250	1.55
N6505-03000-048	3	3.79	16	Full	4	250	1.89

Novaflex 3-A Series Hoses

6506 Series Hose

Connoisseurs Food & Beverage Hose



- Tube:** White chlorobutyl (non oily applications)
- Reinforcement:** Multiple plies of polyester tire cord & dual monofilament helix
- Cover:** Gray EPDM abrasion resistant
- Length:** 100 ft.
- Temperature:** -40°F (-40°C) to +240°F (+116°C)
(Cleaning In Place to 248°F (+120°C) Not for continuous steam service.)

Special kink and crush resistant suction & discharge hose, designed for those more demanding applications requiring a product that meets 3-A (cert# 1376), FDA & USDA standards. Designed to meet the temperatures and chemical resistance associated with “cleaning in place” systems. This ultra smooth microbe resistant tube is built for non-oily applications, on special stainless steel mandrels for cleanliness.

Item #	I.D.	O.D.	MBR	VAC	Plies	WP	WT
			(in)	(HG)		psi	lbs/ft
N6506-00750-012	¾	1.41	3.0	Full	2	250	0.33
N6506-01000-016	1	1.64	3.5	Full	2	250	0.44
N6506-01500-024	1½	2.14	4.5	Full	2	250	0.63
N6506-02000-032	2	2.77	7.0	Full	4	250	1.21
N6506-02500-040	2½	3.29	13.0	Full	4	250	1.52
N6506-03000-048	3	3.79	16.0	Full	4	250	1.84

6507NB Series Hose

NovaBrew



- Tube:** White chlorobutyl (non oily applications)
- Reinforcement:** Multiple plies of polyester tire cord & dual monofilament helix rods
- Cover:** Dark burgundy EPDM
- Length:** 100 ft.
- Temperature:** -40°F (-40°C) to +240°F (+116°C)
(Can be open end steam cleaned) CIP to 248°F (+120°C)

NovaBrew is a state of the art designed hose based on the specific requirements of the modern day brewery. NovaBrew has a rugged but flexible construction with a super smooth white hose tube for non-oily applications, that is microbe resistant along with a dark burgundy red cover that resists dirt scuffs and is easily cleaned. NovaBrew is built on stainless steel mandrels for cleanliness and meets FDA USDA and 3-A (certificate #1376).

Item #	I.D.	O.D.	WP	MBR	Vacuum	WT
			psi		Hg	lbs/ft
N6507-07500-012	¾	1.41	250	4	Full	0.33
N6507-01000-016	1	1.64	250	4	Full	0.48
N6507-01500-024	1½	2.14	250	5	Full	0.65
N6507-02000-032	2	2.77	250	7	Full	1.26
N6507-02500-040	2½	3.29	250	13	Full	1.54

Sanitary Fittings, Adaptors, Valve, Clamps

JGB offers a large selection of FDA approved high-purity Sanitary Fittings, Adaptors, Vales, and Clamps for Food, Dairy, Beverage, Biotech, Pharmaceutical, and all other Sanitary Process markets. Our Sanitary Fittings, Adaptors, Valve, Clamps meet FDA and USDA standards.

Sanitary Fittings are available in 316 Stainless Steel, 304 Steel, Polypropylene, PVDF, Polyethylene and many other sanitary materials.

These Sanitary Hose Fittings are available:

- Tri-Clamp®
- Bevel Seat
- Sanitary Clamp
- Butterfly Valves
- I-Line
- Butt Weld
- Spray Balls
- Sight Glass

Bradford Sanitary Stems (Tri-Clamp)



- 316 Stainless Steel Sanitary Stems
- Meets FDA and USDA sanitary standards
- 1 inch to 4 inch
- Dixon sanitary crimp stems are only to be used with Dixon stainless steel crimp ferrules

Dixon Sanitary Hose Fittings



- Dixon Tri-Clamp
- Dixon I-Line M x F
- Dixon Bevel Seat with Acme Nut

Sanitary Butterfly Valve Adapter



- Holedall & Sanitary Fittings
- N3 - 316 Stainless Steel Seat ring: EPDM
- Convoluted and Jack-Chem Fittings

Sanitary Fittings, Adaptors, Valve, Clamps

Bradford Round with Nitrile Inserts and Coupler - B24RPHC



- Holedall & Sanitary Fittings
- Nitrile inserts maximum temperature: 230°
- Coupler thread options:
- Standard - 3/8 NPT / Special - all thread
- 3/8-16 (part #B24RPHC16-G***)
- 1/2-13 (part # B24RPHC13-G***)

PT Coupling White Nitrile Food Grade Gasket



- Holedall & Sanitary Fittings
- White Nitrile Food Grade Gasket - 1½ Inch
- ProGrip™ Fittings - Sanitary Wine Fittings
- Made in the U.S.A.

Tri-Clamp - Stainless Steel - PT Coupling Tri-Clover Clamp



- Holedall & Sanitary Fittings
- ProGrip™ Fittings - SE Internal Expansion System
- Sanitary Tri-Clamp - Stainless Steel
- Made in the U.S.A.

Parker MSAN-S Mini Sanitary Fittings



- Holedall & Sanitary Fittings
- 316 Stainless Steel
- Crimp Fittings / Sanitary Fittings

Sanitary Fittings, Adaptors, Valve, Clamps

Parker FBS-S Female Bevel Seat Sanitary Fittings



- Holedall & Sanitary Fittings
- Crimp Fittings / Sanitary Fittings
- 316 Stainless Steel

Dixon Sanitary Clamps



- Holedall & Sanitary Fittings
- Crimp Fittings / Sanitary Fittings
- 316 Stainless Steel

Dixon Spring Check Valves



- Holedall & Sanitary Fittings
- Full Size Flowplate - Long Bushing
- 316 Stainless Steel
- This spring check valve is machined and polished to 3A standards.

1032 Sanitary Pressure Gauges / 4 1/2 inch Dial



- Sanitary Gauges
- Sanitary Pressure Gauges
- 300 series stainless steel
- Bradford™ gauges meet 3A Sanitary Standards for Gauges for Milk and Milk Products, Number 74-00 (Authorization 640).

Sanitary Fittings, Adaptors, Valve, Clamps

3 piece Stainless Steel Sanitary Ball Valve / BV2CV-050BB-FPC



- Ball Valve Automation
- BV2CV-050BB-FPC
- Industrial Ball Valves with Actuation
- Bradford™ automated ½” encapsulated 2-way ball valve butt weld ends spring

304 Sample Sanitary Valve



- Sample Valves
- 304 stainless steel
- Silicone O-ring and plunger to ensure a leak-proof connection
- Surface finish polished to sanitary standards
- End connections available: clamp and NPT

Bradford B5102 Series Sanitary Butterfly Valve



The 5102 series is a patented clamp butterfly valve. This clamp valve is an incredible 1-3/8” wide on all sizes. The valve will fit into ¾” of line space. The grooved clamp housing connects directly to clamp style fittings. Easy assembly by removing the wing nuts and using a hex key for the handle to secure and seal the housing onto your lines.


Additional Resources:

Your Hose & Fitting Connection

Click for locations:




Disaster Relief Catalog



Industrial Rental Catalog
Hoses, Fittings & Assemblies



Oilfield Catalog
Hoses, Fittings & Assemblies



Large Diameter Hose
(LDH) Catalog




New England Region

115 Metropolitan Park Dr.
Liverpool, NY 13088
(315) 451-2770




Great Lakes Region

2540 Walden Ave. Suite 150
Cheektowaga, NY 14225
(716) 684-8224




Midwest Region

242 Carondelet Commons Blvd.
St. Louis, MO 63111
(314) 256-0833



Mid-Atlantic Region

1407 Westinghouse Blvd. Suite B
Charlotte, NC 28273
(704) 588-9920



Gulf Coast Region

619 E Sam Houston Pkwy. Suite 200
Pasadena, TX 77503
(281) 930-7777

Liverpool Location ISO 9001:2015 Certified QMS by Intertek

